



MAXAM Flotxtra MS961R

STARCO joins forces with original equipment manufacturers across Europe to develop and deliver standard or bespoke quality wheel solutions that improve performance of agricultural implements. Maxam Flotxtra MS961R works hard in the field and well on the road.

In the field

Soil protection

- ▶ Optimum protection of grass sward and crops by rounded tread lug edges.
- ▶ Low soil compaction by wide tread lugs construction and better pressure distribution in the footprint due to tread stiffness

Lateral stability

- ▶ Excellent lateral grip by special block design with multi oriented faces combined with excellent selfcleaning properties




On the road

Durability & mileage

- ▶ Full steel construction extremely robust to perforation.
- ▶ Excellent mileage performance thanks to special rubber compound

Safety

- ▶ Limited stone and mud retention due to optimum tread geometry. Excellent directional stability due to nearly continuous central rib and tread stiffness

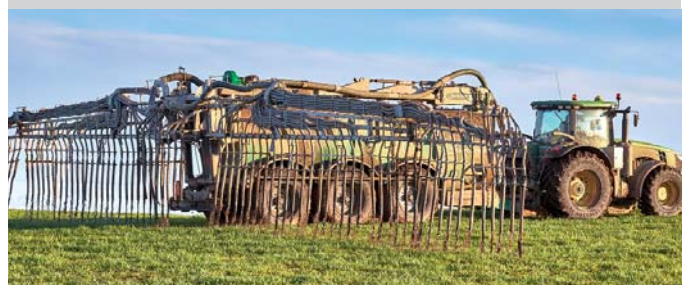



MAXAM



| Size | Type | LI/SS | Rim inch. | S.W. mm | O.D. mm | S.L.R. mm | R.C. mm |
|-----------------|------|-------|--------------|---------|---------|-----------|---------|
| 600/50R22.5 IMP | TL | 159 D | AG20.00×22.5 | 611 | 1172 | 527 | 3550 |
| 500/60R22.5 IMP | TL | 155 D | AG16.00×22.5 | 503 | 1172 | 527 | 3550 |
| 560/60R22.5 IMP | TL | 161 D | AG16.00×22.5 | 543 | 1244 | 560 | 3770 |
| 560/45R22.5 IMP | TL | 152 D | AG16.00×22.5 | 543 | 1076 | 484 | 3260 |
| 710/40R22.5 IMP | TL | 161 D | AG24.00×22.5 | 727 | 1140 | 513 | 3455 |
| 600/55R26.5 IMP | TL | 165 D | AG20.00×26.5 | 611 | 1333 | 600 | 4040 |
| 650/55R26.5 IMP | TL | 169 D | AG20.00×26.5 | 645 | 1389 | 625 | 4210 |
| 710/50R26.5 IMP | TL | 170 D | AG24.00×26.5 | 727 | 1383 | 622 | 4190 |
| 800/45R26.5 IMP | TL | 174 D | AG28.00×26.5 | 828 | 1393 | 627 | 4220 |
| 650/65R30.5 IMP | TL | 176 D | AG20.00×30.5 | 645 | 1621 | 729 | 4910 |
| 710/50R30.5 IMP | TL | 167 D | AG24.00×30.5 | 727 | 1485 | 668 | 4500 |
| 750/60R30.5 IMP | TL | 181 D | AG24.00×30.5 | 754 | 1675 | 754 | 5075 |



The e-coat is an electrodeposition coating process, in which steel wheels are given a priming coat that will prevent rust and corrosion throughout the normal working life of the wheel.

The coating process is environmentally friendly and serves as a rust prevention coating in itself - and also as an excellent primer to prepare the wheel for subsequent bespoke painting.

By this STARCO is using the latest automotive nanotechnology pre-treatment.

STARCO is the only manufacturer of pressed wheels with e-coat technology.

About e-coating

STARCO – a Kenda company

STARCO has been a pioneering force in the wheel and tyre industry for more than 55 years. Today, 550 STARCONians make up a great team bound by a passion to develop, manufacture and deliver clever wheel solutions. STARCO's speciality is low and high volume standard and bespoke complete wheels for a wide range of applications – from the smallest wheelbarrow or trailer, to large agricultural or industrial machines and implements.

With factories in the UK, Croatia and China, as well as eight sales and distribution locations across Europe, STARCO has a widespread distribution network. STARCO is a part of the Kenda Group that is one of the world's leading tyre and tube manufacturers with factories all over the world and 10,000 employees globally.

[Learn more at starco.com](http://starco.com)